6 Independent Power

6.1 PAC60S12-AN (02131664: 60 W AC&HVDC Power)
6.2 PAC60S12-AN (02131664-001: 60 W AC&HVDC Power)
6.3 PAC240S56-CN (240 W PoE AC&HVDC Power)
6.4 PAC240S55-DN (240 W PoE AC&HVDC Power)
6.5 AD-120100B0W (Adapter Power-AD-120100B0W-English-12W-Level 6)
6.6 AD-120100E0W (Adapter Power-AD-120100E0W-Eurpoe-12W-Erp6-White)
6.7 AD-120100U0W (Adapter Power-AD-120100U0W-America-12W-DOE6)
6.8 AD-120200B0W (Adapter Power-AD-120200B0W,English-24W,Level 6)
6.9 AD-120200C1W (Adapter Power-AD-120200C1W-Chinese-24W)
6.10 AD-120200E0W (Adapter Power-AD-120200E0W-Eurpoe-24W-Erp6)
6.11 AD-120200U1W (Adapter Power-AD-120200U1W-America-24W-DOE6)
6.12 HW-120100D0D (Adapter Power-HW-120100D0D-Desktop-Black-12W)
6.13 AD-560090D0D (Adapter Power-AD-560090D0D-Desktop-50.4W-ERPVI)
6.14 DCADP-56V-1A07 (Adapter Power-56V/1.07A-Desktop-60W-CoC V5 tier2)
6.15 AD-540278D0D (02222067: Adapter Power-AD-540278D0D-Desktop-150W-ErP 6-White)
6.16 AD-540278D0D (02222067-001: Adapter Power-AD-540278D0D-Desktop-150W-ErP 6-White)
6.17 HW-560268D0D (Adapter-HW-560268D0D-Tabletop-150W-ERP6)

6.1 PAC60S12-AN (02131664: 60 W AC&HVDC Power)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-1 Basic information about the PAC60S12-AN

Item	Details
Description	60 W AC&HVDC Power
Part Number	02131664
Model	PAC60S12-AN

Appearance

Figure 6-1 Appearance of the PAC60S12-AN

Version Mapping

Table 6-2 Mappings between PAC60S12-AN and product models

Product	Product Model	First Supported Version	Limitations
S5731I-L	S5731I-L16T2S2XN (98012425)	V600R024C00	-
S5731I-L	S5731I-L8T2S2XN (98012423)	V600R024C00	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5731I-L	S5731I-L8T2SN (98012422)	V600R024C00	-
S5735I-H-V2	S5735I-H8T2XN-V2 (98012687)	V600R024C10	-
S5735I-S-V2	S5735I-H8T4S2XN-V2 (98012185)	V600R023C00	-
S5735I-S-V2	S5735I-S16T2S4XN-V2 (98012427)	V600R024C00	-
S5735I-S-V2	S5735I-S8T4SN-V2 (98012086)	V600R022C01	-
S5735I-S-V2	S5735I-S8T4SN-V2 (98012086-001)	V600R025C10	-
S5735I-S-V2	S5735I-S8T4XN-V2 (98012064)	V600R022C01	-
S5735I-S-V2	S5735I-S8T4XN-V2 (98012064-001)	V600R025C10	-

 Copyright © Huawei Technologies Co., Ltd.

Panel

Figure 6-2 Panel of the PAC60S12-AN

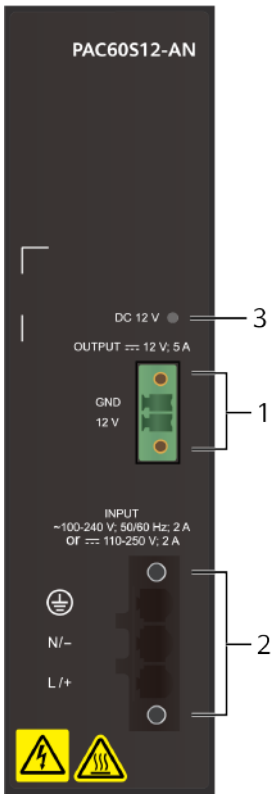

1. 2-pin DC output power socket **NOTE** Connect the power cable to the switch using a power cable with a "Power Cable (with 2PIN-I Terminal Blocks)". 2PIN connectors are included in the auxiliary material package delivered with the device.	2. AC/DC input power socket **NOTE** Connect the power adapter to an external power supply system using a power cable with a "3-Pin AC/DC Power Terminal Block". 3PIN connectors are included in the auxiliary material package delivered with the device.	3. DC 12 V power output indicator

Table 6-3 Indicators on the PAC60S12-AN

Silkscreen	Name	Color	Status	Description
DC 12 V	DC 12 V indicator	Green	Steady on	The power supply is working properly.

 Copyright © Huawei Technologies Co., Ltd.

Silkscreen	Name	Color	Status	Description
		Green	Blinking	The power supply is in hiccup protection state.
		-	Off	The power supply output is abnormal.

Functions and Features

Table 6-4 Functions and features of the PAC60S12-AN

Functions and Features	Description
Input overcurrent protection	The power module cannot automatically resume power supply from this protection state.
Input undervoltage protection	The power module can automatically resume power supply from this protection state.
Output overvoltage protection	The power module can automatically resume power supply from this protection state.
Output overcurrent protection	The power module can automatically resume power supply from this protection state.
Output short-circuit protection	The power module can automatically resume power supply from this protection state.
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.

 Copyright © Huawei Technologies Co., Ltd.

Technical Specifications

Table 6-5 Technical specifications of the PAC60S12-AN

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	150 mm x 40 mm x 130 mm (5.91 in. x 1.57 in. x 5.12 in.)
Weight without packaging [kg(lb)]	0.9 kg (1.98 lb)
Rated input voltage [V]	• AC input: 100 V AC to 240 V AC; 50/60 Hz • DC input: 110 V DC to 250 V DC
Input voltage range [V]	• AC input: 90 V AC to 290 V AC • DC input: 88 V DC to 300 V DC
Rated input current [A]	2 A
Rated output voltage [V]	12 V DC
Rated output current [A]	5 A
Rated output power [W]	60 W
Power dissipation Mode	Natural heat dissipation
Hot swapping	Supported

6.2 PAC60S12-AN (02131664-001: 60 W AC&HVDC Power)

Overview

Table 6-6 Basic information about the PAC60S12-AN

Item	Details
Description	60 W AC&HVDC Power
Part Number	02131664-001
Model	PAC60S12-AN

 Copyright © Huawei Technologies Co., Ltd.

Version Mapping

Table 6-7 Mappings between PAC60S12-AN and product models

Product	Product Model	First Supported Version	Limitations
S5731I-L	S5731I-L16T2S2XN (98012425)	V600R024C00	-
S5731I-L	S5731I-L8T2S2XN (98012423)	V600R024C00	-
S5731I-L	S5731I-L8T2SN (98012422)	V600R024C00	-
S5735I-H-V2	S5735I-H8T2XN-V2 (98012687)	V600R024C10	-
S5735I-S-V2	S5735I-H8T4S2XN-V2 (98012185)	V600R023C00	-
S5735I-S-V2	S5735I-S16T2S4XN-V2 (98012427)	V600R024C00	-
S5735I-S-V2	S5735I-S8T4SN-V2 (98012086)	V600R022C01	-
S5735I-S-V2	S5735I-S8T4SN-V2 (98012086-001)	V600R025C10	-
S5735I-S-V2	S5735I-S8T4XN-V2 (98012064)	V600R022C01	-
S5735I-S-V2	S5735I-S8T4XN-V2 (98012064-001)	V600R025C10	-

 Copyright © Huawei Technologies Co., Ltd.

Panel

1. 2-pin DC output power socket **NOTE** Connect the power cable to the switch using a power cable with a "Power Cable (with 2PIN-I Terminal Blocks)". 2PIN connectors are included in the auxiliary material package delivered with the device.	2. AC/DC input power socket **NOTE** Connect the power adapter to an external power supply system using a power cable with a "3-Pin AC/DC Power Terminal Block". 3PIN connectors are included in the auxiliary material package delivered with the device.	3. DC 12 V power output indicator

Table 6-8 Indicators on the PAC60S12-AN

Silkscreen	Name	Color	Status	Description
DC 12 V	DC 12 V indicator	Green	Steady on	The power supply is working properly.
		Green	Blinking	The power supply is in hiccup protection state.
		-	Off	The power supply output is abnormal.

Functions and Features

Table 6-9 Functions and features of the PAC60S12-AN

Functions and Features	Description
Input overcurrent protection	The power module cannot automatically resume power supply from this protection state.
Input undervoltage protection	The power module can automatically resume power supply from this protection state.
Output overvoltage protection	The power module can automatically resume power supply from this protection state.

 Copyright © Huawei Technologies Co., Ltd.

Functions and Features	Description
Output overcurrent protection	The power module can automatically resume power supply from this protection state.
Output short-circuit protection	The power module can automatically resume power supply from this protection state.
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.

Technical Specifications

Table 6-10 Technical specifications of the PAC60S12-AN

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	150 mm x 40 mm x 130 mm (5.91 in. x 1.57 in. x 5.12 in.)
Weight without packaging [kg(lb)]	0.9 kg (1.98 lb)
Rated input voltage [V]	• AC input: 100 V AC to 240 V AC; 50/60 Hz • DC input: 110 V DC to 250 V DC
Input voltage range [V]	• AC input: 90 V AC to 290 V AC • DC input: 88 V DC to 300 V DC
Rated input current [A]	2 A
Rated output voltage [V]	12 V DC
Rated output current [A]	5 A
Rated output power [W]	60 W
Power dissipation Mode	Natural heat dissipation
Hot swapping	Supported

6.3 PAC240S56-CN (240 W PoE AC&HVDC Power)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-11 Basic information about the PAC240S56-CN

Item	Details
Description	240 W PoE AC&HVDC Power
Part Number	02131265
Model	PAC240S56-CN

Appearance

Figure 6-3 Appearance of the PAC240S56-CN

Version Mapping

Table 6-12 Mappings between PAC240S56-CN and product models

Product	Product Model	First Supported Version	Limitations
S5731I-L	S5731I-L8P2S2XN (98012424)	V600R024C00	-
S5735I-H-V2	S5735I-H8U2XN-V2 (98012685)	V600R024C10	-
S5735I-H-V2	S5735I-H8U2XN-V2 (98012685-001)	V600R025C10	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5735I-S-V2	S5735I-S8T8P2S4XN-V2 (98012426)	V600R024C00	-
S5735I-S-V2	S5735I-S8T8P2S4XN-V2 (98012426-001)	V600R025C10	-
S5735I-S-V2	S5735I-S8U2XN-V2 (98012686)	V600R024C10	-
S5735I-S-V2	S5735I-S8U2XN-V2 (98012686-001)	V600R025C10	-
S5735I-S-V2	S5735I-S8U4XN-V2 (98012066)	V600R022C01	-
S5735I-S-V2	S5735I-S8U4XN-V2 (98012066-001)	V600R025C10	-

Panel

Figure 6-4 Panel of the PAC240S56-CN

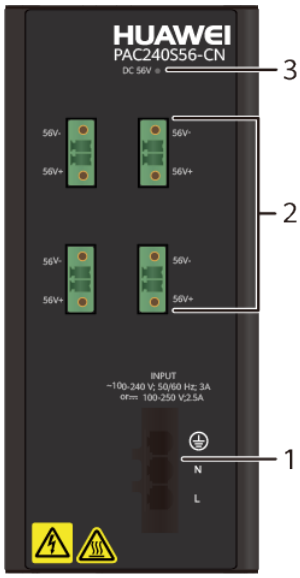

 Copyright © Huawei Technologies Co., Ltd.

1. 3-pin AC/DC input power socket **NOTE** Connect the power adapter to an external power supply system using a power cable with a "3-Pin AC/DC Power Terminal Block". 3PIN connectors are included in the auxiliary material package delivered with the device. The customer needs to prepare the power cable. The recommended conductor diameter of the power cable is 1.0 mm^2.	2. Four 2-pin DC output power sockets **NOTE** Connect the power cable to the switch using a power cable with a "Power Cable (with 2PIN-I Terminal Blocks)". 2PIN connectors are included in the auxiliary material package delivered with the device. The customer needs to prepare the power cable. The recommended conductor diameter of the power cable is 1.0 mm^2.	3. DC 56 V power output indicator

Table 6-13 Indicators on the PAC240S56-CN

Silkscreen	Name	Color	Status	Description
DC 56V	Power output indicator	-	Steady off	The power output is abnormal or the power module is faulty.
		Green	Steady on	The power output is normal.
		Green	Blinking	The power module is in the output overvoltage or overcurrent protection state.

Functions and Features

Table 6-14 Functions and features of the PAC240S56-CN

Function	Description
System power supply and PoE power supply	The power module supports a maximum of 240 W system power and PoE power.

 Copyright © Huawei Technologies Co., Ltd.

Function	Description
Input protection	The power module provides protection against input overvoltage, input undervoltage, and input overcurrent.
Output protection	The power module provides protection against output overvoltage, overcurrent, and short-circuit.
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.

Technical Specifications

Table 6-15 Technical specifications of the PAC240S56-CN

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	150 mm x 65 mm x 133 mm (5.91 in. x 2.56 in. x 5.24 in.)
Weight without packaging [kg(lb)]	1.47 kg (3.24 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz 100 V DC to 250 V DC
Input voltage range [V]	90 V AC to 290 V AC, 45 to 66 Hz 77 V DC to 300 V DC
Maximum input current [A]	100 V AC to 240 V AC: 3 A 100 V DC to 138 V DC: 2.5 A 138 V DC to 250 V DC: 2 A
Rated output voltage [V]	56 V DC
Rated output power [W]	Total power: 240 W
Power dissipation Mode	Natural heat dissipation without fans

6.4 PAC240S55-DN (240 W PoE AC&HVDC Power)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-16 Basic information about the PAC240S55-DN

Item	Details
Description	240 W PoE AC&HVDC Power
Part Number	02131998
Model	PAC240S55-DN

 Copyright © Huawei Technologies Co., Ltd.

Appearance

Figure 6-5 Appearance of the PAC240S55-DN

 Copyright © Huawei Technologies Co., Ltd.

Version Mapping

Table 6-17 Mappings between PAC240S55-DN and product models

Product	Product Model	First Supported Version	Limitations
S5731I-L	S5731I-L8P2S2XN (98012424)	V600R025C10	-
S5735I-H-V2	S5735I-H8U2XN-V2 (98012685)	V600R025C10	-
S5735I-H-V2	S5735I-H8U2XN-V2 (98012685-001)	V600R025C10	-
S5735I-S-V2	S5735I-S8T8P2S4XN-V2 (98012426)	V600R025C10	-
S5735I-S-V2	S5735I-S8T8P2S4XN-V2 (98012426-001)	V600R025C10	-
S5735I-S-V2	S5735I-S8U2XN-V2 (98012686)	V600R025C10	-
S5735I-S-V2	S5735I-S8U2XN-V2 (98012686-001)	V600R025C10	-
S5735I-S-V2	S5735I-S8U4XN-V2 (98012066)	V600R025C10	-
S5735I-S-V2	S5735I-S8U4XN-V2 (98012066-001)	V600R025C10	-

 Copyright © Huawei Technologies Co., Ltd.

Panel

Figure 6-6 Panel of the PAC240S55-DN

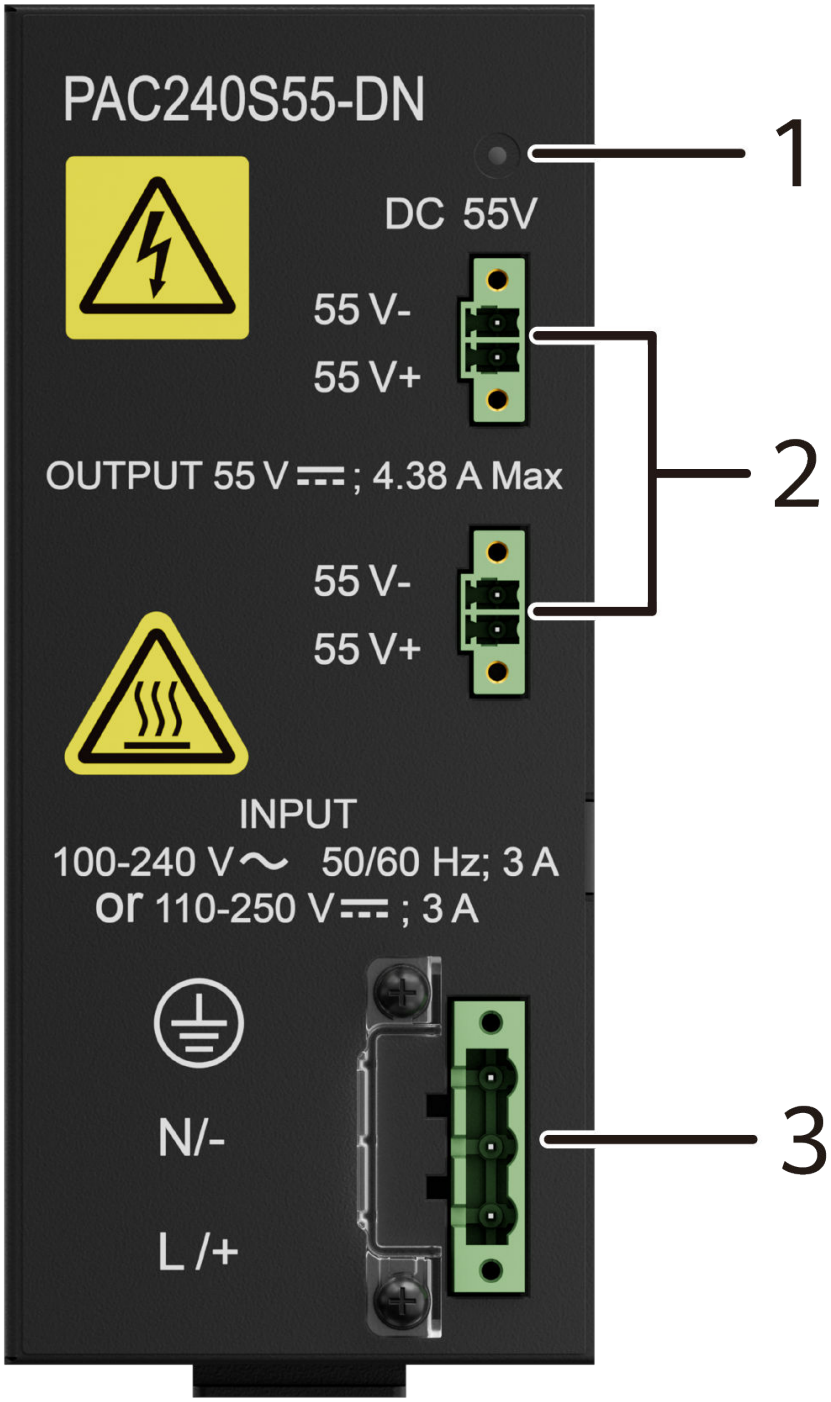

 Copyright © Huawei Technologies Co., Ltd.

1. DC 55 V power output indicator	2. Two 2-pin DC output power sockets **NOTE** Connect the power cable to the switch using a power cable with a "Power Cable (with 2PIN-I Terminal Blocks)". 2PIN connectors are included in the auxiliary material package delivered with the device. The customer needs to prepare the power cable. The recommended conductor diameter of the power cable is 1.0 mm^2.	3. 3-pin AC/DC input power socket **NOTE** Connect the power adapter to an external power supply system using a power cable with a "3-Pin AC/DC Power Terminal Block". 3PIN connectors are included in the auxiliary material package delivered with the device. The customer needs to prepare the power cable. The recommended conductor diameter of the power cable is 1.0 mm^2.

Table 6-18 Indicators on the PAC240S55-DN

Silkscreen	Name	Color	Status	Description
DC 55V	Power output indicator	-	Off	The power output is abnormal or the power module is faulty.
		Green	Steady on	The power supply is normal.
		Green	Blinking	Output overvoltage or overcurrent protection is triggered.

Functions and Features

Figure 6-7 Internal architecture diagram of an industrial power supply

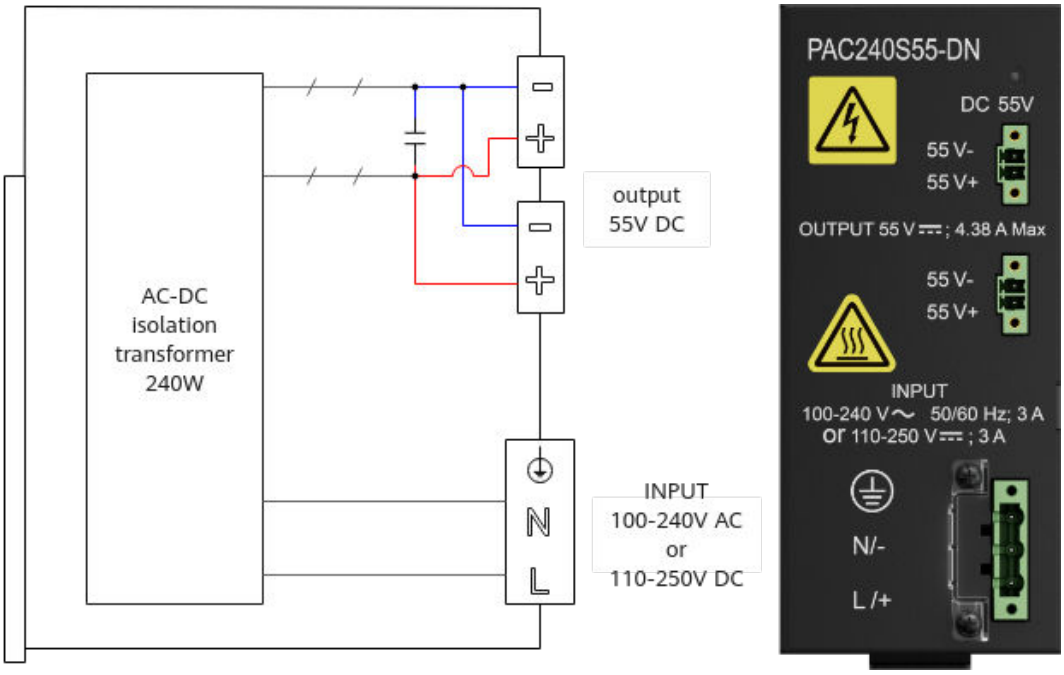

NOTE

In non-redundant power backup scenarios, the two output terminals of the PAC240S55-DN share a total power of 240 W and are directly connected inside the power supply. It is recommended that one power supply be connected to only one device. Do not power two devices from a single industrial power supply, as a short-circuit fault on one device will cause the other device to lose power as well.

In power redundancy backup scenarios, you are advised to connect two PAC240S55-DN power supplies to the two input terminals of a single device, respectively. If only one PAC240S55-DN is connected, the redundancy function cannot be implemented.

Table 6-19 Functions and features of the PAC240S55-DN

Function	Description
System power supply and PoE power supply	The power module supports a maximum of 240 W system power and PoE power.
Input protection	The power module provides protection against input overvoltage, input undervoltage, and input overcurrent.
Output protection	The power module provides protection against output overvoltage, overcurrent, and short-circuit.

 Copyright © Huawei Technologies Co., Ltd.

Function	Description
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.

Technical Specifications

Table 6-20 Technical specifications of the PAC240S55-DN

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	150 mm x 65 mm x 133 mm (5.91 in. x 2.56 in. x 5.24 in.)
Weight without packaging [kg(lb)]	1.4 kg (3.09 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC; 50/60 Hz 110 V DC to 250 V DC
Input voltage range [V]	90 V AC to 290 V AC; 45 Hz to 66 Hz 77 V DC to 300 V DC
Maximum input current [A]	100 V AC to 240 V AC: 3 A 110 V DC to 250 V DC: 3 A
Rated output voltage [V]	55 V DC
Rated output current [A]	4.38 A
Rated output power [W]	240 W
Maximum input cable size [mm^2]	2.08 mm^2
Front-end circuit breaker/fuse [A]	C6/16 A **NOTE** In scenarios where multiple devices are connected to a single circuit breaker, it is recommended that the number of devices be within five and that a circuit breaker rated C20 or above be used.
Power dissipation Mode	Natural heat dissipation without fans
Long-term operating temperature [°C(°F)]	No wind: –40°C to +70°C (–40°F to +158°F) 1 m/s wind: –40°C to +75°C (–40°F to +167°F)

 Copyright © Huawei Technologies Co., Ltd.

6.5 AD-120100B0W (Adapter Power-AD-120100B0W-English-12W-Level 6)

Overview

Table 6-21 Basic information about the AD-120100B0W

Item	Details
Description	Adapter Power-AD-120100B0W-English-12W-Level 6
Part Number	02221936
Model	AD-120100B0W

Appearance

Figure 6-8 Appearance of the AD-120100B0W

 Copyright © Huawei Technologies Co., Ltd.

Version Mapping

Table 6-22 Mappings between AD-120100B0W and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L8T2HJ-RUA (98012491)	V600R024C00	-
S5751-L-RU	S5751-L8T2HX-RUA (98012490)	V600R024C00	-
S5751-L-RU	S5751-L8T2J-RUA (98012463)	V600R024C00	-
S5751-L-RU	S5751-L8T2X-RUA (98012462)	V600R024C00	-
S5751-L-RU	S5751-L8T2X-RUA (98012462-001)	V600R024C00	-
S5751-L-RU	S5751-L8T2X-RUA (98012462-002)	V600R024C00	-
S5751R-L	S5751R-L8T2J-QA (98012693)	V600R024C10	-
S5751R-L	S5751R-L8T2X-QA (98012692)	V600R024C10	-

Technical Specifications

Table 6-23 Technical specifications of the AD-120100B0W

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	62.3 mm x 49 mm x 70 mm (2.45 in. x 1.93 in. x 2.76 in.)
Weight without packaging [kg(lb)]	0.1 kg (0.22 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 264 V AC; 45 Hz to 65 Hz
Maximum input current [A]	0.5 A
Rated output voltage [V]	12 V
Rated output current [A]	1 A
Rated output power [W]	12 W

 Copyright © Huawei Technologies Co., Ltd.

Item	Specification
Power dissipation Mode	Natural heat dissipation without fans

6.6 AD-120100E0W (Adapter Power-AD-120100E0W-Eurpoe-12W-Erp6-White)

Overview

Table 6-24 Basic information about the AD-120100E0W

Item	Details
Description	Adapter Power-AD-120100E0W-Eurpoe-12W-Erp6-White
Part Number	02221933
Model	AD-120100E0W

 Copyright © Huawei Technologies Co., Ltd.

Appearance

Figure 6-9 Appearance of the AD-120100E0W

Version Mapping

Table 6-25 Mappings between AD-120100E0W and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L8T2HJ-RUA (98012491)	V600R024C00	-
S5751-L-RU	S5751-L8T2HX-RUA (98012490)	V600R024C00	-
S5751-L-RU	S5751-L8T2J-RUA (98012463)	V600R024C00	-
S5751-L-RU	S5751-L8T2X-RUA (98012462)	V600R024C00	-
S5751-L-RU	S5751-L8T2X-RUA (98012462-001)	V600R024C00	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L8T2X-RUA (98012462-002)	V600R024C00	-
S5751R-L	S5751R-L8T2J-QA (98012693)	V600R024C10	-
S5751R-L	S5751R-L8T2X-QA (98012692)	V600R024C10	-

Technical Specifications

Table 6-26 Technical specifications of the AD-120100E0W

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	67 mm x 46 mm x 70 mm (2.64 in. x 1.81 in. x 2.76 in.)
Weight without packaging [kg(lb)]	0.1 kg (0.22 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 264 V AC; 45 Hz to 65 Hz
Maximum input current [A]	0.5 A
Rated output voltage [V]	12 V
Rated output current [A]	1 A
Rated output power [W]	12 W
Power dissipation Mode	Natural heat dissipation without fans

6.7 AD-120100U0W (Adapter Power-AD-120100U0W-America-12W-DOE6)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-27 Basic information about the AD-120100U0W

Item	Details
Description	Adapter Power-AD-120100U0W-America-12W-DOE6
Part Number	02221932
Model	AD-120100U0W

Appearance

Figure 6-10 Appearance of the AD-120100U0W

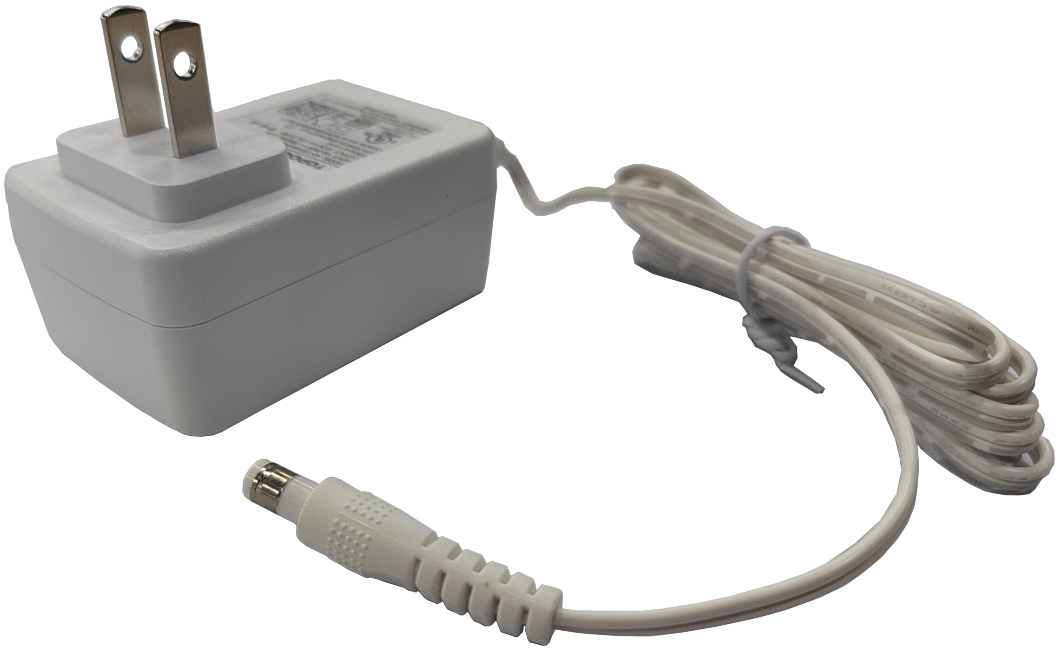

Version Mapping

Table 6-28 Mappings between AD-120100U0W and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L8T2HJ-RUA (98012491)	V600R024C00	-
S5751-L-RU	S5751-L8T2HX-RUA (98012490)	V600R024C00	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L8T2J-RUA (98012463)	V600R024C00	-
S5751-L-RU	S5751-L8T2X-RUA (98012462)	V600R024C00	-
S5751-L-RU	S5751-L8T2X-RUA (98012462-001)	V600R024C00	-
S5751-L-RU	S5751-L8T2X-RUA (98012462-002)	V600R024C00	-
S5751R-L	S5751R-L8T2J-QA (98012693)	V600R024C10	-
S5751R-L	S5751R-L8T2X-QA (98012692)	V600R024C10	-

Technical Specifications

Table 6-29 Technical specifications of the AD-120100U0W

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	50.6 mm x 46 mm x 70 mm (1.99 in. x 1.81 in. x 2.76 in.)
Weight without packaging [kg(lb)]	0.1 kg (0.22 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum input current [A]	0.5 A
Rated output voltage [V]	12 V
Rated output current [A]	1 A
Rated output power [W]	12 W
Power dissipation Mode	Natural heat dissipation without fans

6.8 AD-120200B0W (Adapter Power-AD-120200B0W,English-24W,Level 6)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-30 Basic information about the AD-120200B0W

Item	Details
Description	Adapter Power-AD-120200B0W,English-24W,Level 6
Part Number	02222215
Model	AD-120200B0W

 Copyright © Huawei Technologies Co., Ltd.

Appearance

Figure 6-11 Appearance of the AD-120200B0W

 Copyright © Huawei Technologies Co., Ltd.

Version Mapping

Table 6-31 Mappings between AD-120200B0W and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L16T2J-RUA (98012794)	V600R025C00	-
S5751-L-RU	S5751-L16T2X-RUA (98012792)	V600R025C00	-
S5751R-L	S5751R-L16T2J-QA (98012795)	V600R025C00	-
S5751R-L	S5751R-L16T2X-QA (98012793)	V600R025C00	-

Technical Specifications

Table 6-32 Technical specifications of the AD-120200B0W

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	34.3 mm x 85.5 mm x 51 mm (1.35 in. x 3.37 in. x 2.01 in.)
Weight without packaging [kg(lb)]	0.143 kg (0.32 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 264 V AC; 45 Hz to 65 Hz
Maximum input current [A]	/
Rated output voltage [V]	12 V
Rated output current [A]	2 A
Rated output power [W]	24 W
Power dissipation Mode	Natural heat dissipation without fans

6.9 AD-120200C1W (Adapter Power-AD-120200C1W-Chinese-24W)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-33 Basic information about the AD-120200C1W

Item	Details
Description	Adapter Power-AD-120200C1W-Chinese-24W
Part Number	02221792
Model	AD-120200C1W

Appearance

Figure 6-12 Appearance of the AD-120200C1W

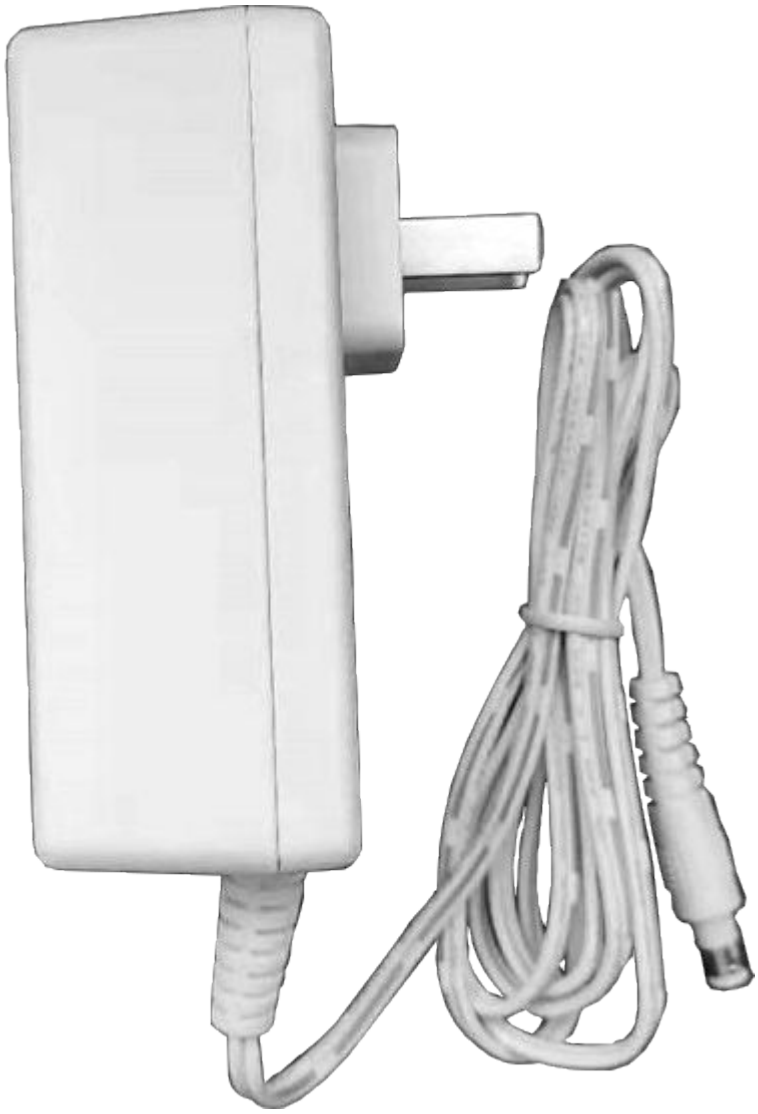

 Copyright © Huawei Technologies Co., Ltd.

Version Mapping

Table 6-34 Mappings between AD-120200C1W and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L16T2J-RUA (98012794)	V600R025C00	-
S5751-L-RU	S5751-L16T2X-RUA (98012792)	V600R025C00	-
S5751R-L	S5751R-L16T2J-QA (98012795)	V600R025C00	-
S5751R-L	S5751R-L16T2X-QA (98012793)	V600R025C00	-

Technical Specifications

Table 6-35 Technical specifications of the AD-120200C1W

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	32 mm x 86 mm x 51 mm (1.26 in. x 3.39 in. x 2.01 in.)
Weight without packaging [kg(lb)]	0.143 kg (0.32 lb)
Number of inputs	1
Rated input voltage [V]	170 V AC to 240 V AC; 50/60 Hz
Input voltage range [V]	170 V AC to 264 V AC; 47 Hz to 63 Hz
Maximum input current [A]	/
Rated output voltage [V]	12 V
Rated output current [A]	2 A
Rated output power [W]	24 W
Power dissipation Mode	Natural heat dissipation without fans

6.10 AD-120200E0W (Adapter Power-AD-120200E0W-Eurpoe-24W-Erp6)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-36 Basic information about the AD-120200E0W

Item	Details
Description	Adapter Power-AD-120200E0W-Eurpoe-24W-Erp6
Part Number	02222214
Model	AD-120200E0W

Appearance

Figure 6-13 Appearance of the AD-120200E0W

 Copyright © Huawei Technologies Co., Ltd.

Version Mapping

Table 6-37 Mappings between AD-120200E0W and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L16T2J-RUA (98012794)	V600R025C00	-
S5751-L-RU	S5751-L16T2X-RUA (98012792)	V600R025C00	-
S5751R-L	S5751R-L16T2J-QA (98012795)	V600R025C00	-
S5751R-L	S5751R-L16T2X-QA (98012793)	V600R025C00	-

Technical Specifications

Table 6-38 Technical specifications of the AD-120200E0W

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	34.3 mm x 85.5 mm x 51 mm (1.35 in. x 3.37 in. x 2.01 in.)
Weight without packaging [kg(lb)]	0.143 kg (0.32 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 264 V AC; 45 Hz to 65 Hz
Maximum input current [A]	/
Rated output voltage [V]	12 V
Rated output current [A]	2 A
Rated output power [W]	24 W
Power dissipation Mode	Natural heat dissipation without fans

6.11 AD-120200U1W (Adapter Power-AD-120200U1W-America-24W-DOE6)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-39 Basic information about the AD-120200U1W

Item	Details
Description	Adapter Power-AD-120200U1W-America-24W-DOE6
Part Number	02222213
Model	AD-120200U1W

 Copyright © Huawei Technologies Co., Ltd.

Appearance

Figure 6-14 Appearance of the AD-120200U1W

Version Mapping

Table 6-40 Mappings between AD-120200U1W and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L16T2J-RUA (98012794)	V600R025C00	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L16T2X-RUA (98012792)	V600R025C00	-
S5751R-L	S5751R-L16T2J-QA (98012795)	V600R025C00	-
S5751R-L	S5751R-L16T2X-QA (98012793)	V600R025C00	-

Technical Specifications

Table 6-41 Technical specifications of the AD-120200U1W

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	34.3 mm x 85.5 mm x 51 mm (1.35 in. x 3.37 in. x 2.01 in.)
Weight without packaging [kg(lb)]	0.143 kg (0.32 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 264 V AC; 45 Hz to 65 Hz
Maximum input current [A]	/
Rated output voltage [V]	12 V
Rated output current [A]	2 A
Rated output power [W]	24 W
Power dissipation Mode	Natural heat dissipation without fans

6.12 HW-120100D0D (Adapter Power-HW-120100D0D-Desktop-Black-12W)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-42 Basic information about the HW-120100D0D

Item	Details
Description	Adapter Power-HW-120100D0D-Desktop-Black-12W
Part Number	02221222
Model	HW-120100D0D

Appearance

Figure 6-15 Appearance of the HW-120100D0D

Version Mapping

Table 6-43 Mappings between HW-120100D0D and product models

Product	Product Model	First Supported Version	Limitations
S5731-L-RU	S5731-L4T2S-RUA (98011768)	V200R021C10	-
S5731-L-RU	S5731-L4T2ST-RUA (98011770)	V200R021C10	-
S5731-L-RU	S5731-L8T2ST-RUA (98011778)	V200R021C10	-
S5731S-L-RU	S5731S-L4T2S-RUA (98011769)	V200R021C10	-
S5731S-L-RU	S5731S-L4T2ST-RUA (98011771)	V200R021C10	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5731S-L-RU	S5731S-L8T2ST-RUA (98011779)	V200R021C10	-

Technical Specifications

Table 6-44 Technical specifications of the HW-120100D0D

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	30 mm x 46 mm x 96 mm (1.18 in. x 1.81 in. x 3.78 in.)
Weight without packaging [kg(lb)]	0.1 kg (0.22 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 300 V AC; 47 Hz to 63 Hz
Maximum input current [A]	0.5 A
Rated output voltage [V]	12 V
Rated output current [A]	1 A
Rated output power [W]	12 W
Power dissipation Mode	Natural heat dissipation without fans

6.13 AD-560090D0D (Adapter Power-AD-560090D0D-Desktop-50.4W-ERPVI)

Overview

Table 6-45 Basic information about the AD-560090D0D

Item	Details
Description	Adapter Power-AD-560090D0D-Desktop-50.4W-ERPVI
Part Number	02221860
Model	AD-560090D0D

 Copyright © Huawei Technologies Co., Ltd.

Appearance

Figure 6-16 Appearance of the AD-560090D0D

Version Mapping

Table 6-46 Mappings between AD-560090D0D and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L8LP2J-RUA (98012485)	V600R024C00	-
S5751-L-RU	S5751-L8LP2X-RUA (98012484)	V600R024C00	-
S5751-L-RU	S5751-L8LP4JN-RUA (98013136)	V600R025C10	-
S5751-L-RU	S5751-L8LP4JN-RUA (98013136-001)	V600R025C10	-

 Copyright © Huawei Technologies Co., Ltd.

Technical Specifications

Table 6-47 Technical specifications of the AD-560090D0D

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	30.5 mm x 55 mm x 100 mm (1.20 in. x 2.17 in. x 3.94 in.)
Weight without packaging [kg(lb)]	0.2 kg (0.44 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 264 V AC; 45 Hz to 65 Hz
Maximum input current [A]	1.5 A
Rated output voltage [V]	56 V
Rated output current [A]	0.9 A
Rated output power [W]	50.4 W
Power dissipation Mode	Natural heat dissipation without fans

6.14 DCADP-56V-1A07 (Adapter Power-56V/1.07A-Desktop-60W-CoC V5 tier2)

Overview

Table 6-48 Basic information about the DCADP-56V-1A07

Item	Details
Description	Adapter Power-56V/1.07A-Desktop-60W-CoC V5 tier2
Part Number	02220935
Model	DCADP-56V-1A07
Remarks	C8 AC socket

 Copyright © Huawei Technologies Co., Ltd.

Appearance

Figure 6-17 Appearance of the DCADP-56V-1A07

Version Mapping

Table 6-49 Mappings between DCADP-56V-1A07 and product models

Product	Product Model	First Supported Version	Limitations
S5731-L-RU	S5731-L8LP2ST-RUA (98012186)	V200R022C10	-

Technical Specifications

Table 6-50 Technical specifications of the DCADP-56V-1A07

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	30.5 mm x 55 mm x 130 mm (1.2 in. x 2.17 in. x 5.12 in.)
Weight without packaging [kg(lb)]	0.5 kg (1.1 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 290 V AC, 45 Hz to 65 Hz

 Copyright © Huawei Technologies Co., Ltd.

Item	Specification
Maximum input current [A]	2 A
Rated output voltage [V]	56 V
Rated output current [A]	1.07 A
Rated output power [W]	60 W
Power dissipation Mode	Natural heat dissipation without fans
Hot swapping	Supported

6.15 AD-540278D0D (02222067: Adapter Power-AD-540278D0D-Desktop-150W-ErP 6-White)

Overview

Table 6-51 Basic information about the AD-540278D0D

Item	Details
Description	Adapter Power-AD-540278D0D-Desktop-150W-ErP 6-White
Part Number	02222067
Model	AD-540278D0D

 Copyright © Huawei Technologies Co., Ltd.

Appearance

Figure 6-18 Appearance of the AD-540278D0D

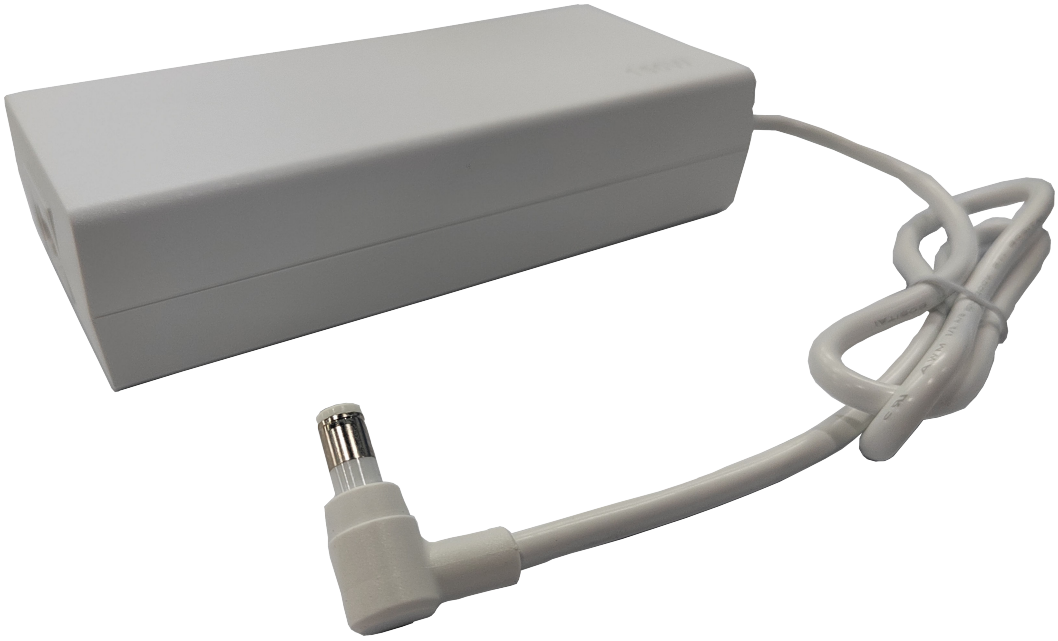

Version Mapping

Table 6-52 Mappings between AD-540278D0D and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L16LP2J-RUA (98012798)	V600R025C00	-
S5751-L-RU	S5751-L16LP2X-RUA (98012796)	V600R025C00	-
S5751-L-RU	S5751-L16LP4UN2X-RUA (98012800)	V600R025C00	-
S5751-L-RU	S5751-L4LP8UN2X-RUA (98012804)	V600R025C00	-
S5751-L-RU	S5751-L8LP4UN2X-RUA (98012802)	V600R025C00	-
S5751-L-RU	S5751-L8P2HJ-RUA (98012493)	V600R024C00	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L8P2HJ-RUA (98012493-001)	V600R024C00	-
S5751-L-RU	S5751-L8P2HX-RUA (98012492)	V600R024C00	-
S5751-L-RU	S5751-L8P2J-RUA (98012487)	V600R024C00	-
S5751-L-RU	S5751-L8P2J-RUA (98012487-001)	V600R024C00	-
S5751-L-RU	S5751-L8P2PN2HX-RUA (98012496)	V600R024C00	-
S5751-L-RU	S5751-L8P2PN2J-RUA (98012494)	V600R024C00	-
S5751-L-RU	S5751-L8P2PN2X-RUA (98012495)	V600R024C00	-
S5751-L-RU	S5751-L8P2PN2X-RUA (98012495-001)	V600R024C00	-
S5751-L-RU	S5751-L8P2X-RUA (98012486)	V600R024C00	-
S5751-L-RU	S5751-L8P2X-RUA (98012486-001)	V600R024C00	-
S5751-L-RU	S5751-L8P4XN-RUA (98013137)	V600R025C10	-
S5751-L-RU	S5751-L8P4XN-RUA (98013137-001)	V600R025C10	-
S5751R-L	S5751R-L16LP2J-QA (98012799)	V600R025C00	-
S5751R-L	S5751R-L16LP2X-QA (98012797)	V600R025C00	-
S5751R-L	S5751R-L16LP4UN2X-QA (98012801)	V600R025C00	-
S5751R-L	S5751R-L4LP8UN2X-QA (98012805)	V600R025C00	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5751R-L	S5751R-L8LP4UN2X-QA (98012803)	V600R025C00	-
S5751R-L	S5751R-L8P2J-QA (98012695)	V600R024C10	-
S5751R-L	S5751R-L8P2PN2X-QA (98012696)	V600R024C10	-
S5751R-L	S5751R-L8P2X-QA (98012694)	V600R024C10	-

Technical Specifications

Table 6-53 Technical specifications of the AD-540278D0D

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	35 mm x 70 mm x 150 mm (1.38 in. x 2.76 in. x 5.91 in.)
Weight without packaging [kg(lb)]	0.4 kg (0.88 lb)
Number of inputs	1
Rated input voltage [V]	170 V AC to 240 V AC; 50/60 Hz
Input voltage range [V]	170 V AC to 264 V AC; 47 Hz to 63 Hz
Maximum input current [A]	2 A
Rated output voltage [V]	54 V
Rated output current [A]	2.78 A
Rated output power [W]	150 W
Power dissipation Mode	Natural heat dissipation without fans

6.16 AD-540278D0D (02222067-001: Adapter Power-AD-540278D0D-Desktop-150W-ErP 6-White)

 Copyright © Huawei Technologies Co., Ltd.

Overview

Table 6-54 Basic information about the AD-540278D0D

Item	Details
Description	Adapter Power-AD-540278D0D-Desktop-150W-ErP 6-White
Part Number	02222067-001
Model	AD-540278D0D

Appearance

Figure 6-19 Appearance of the AD-540278D0D

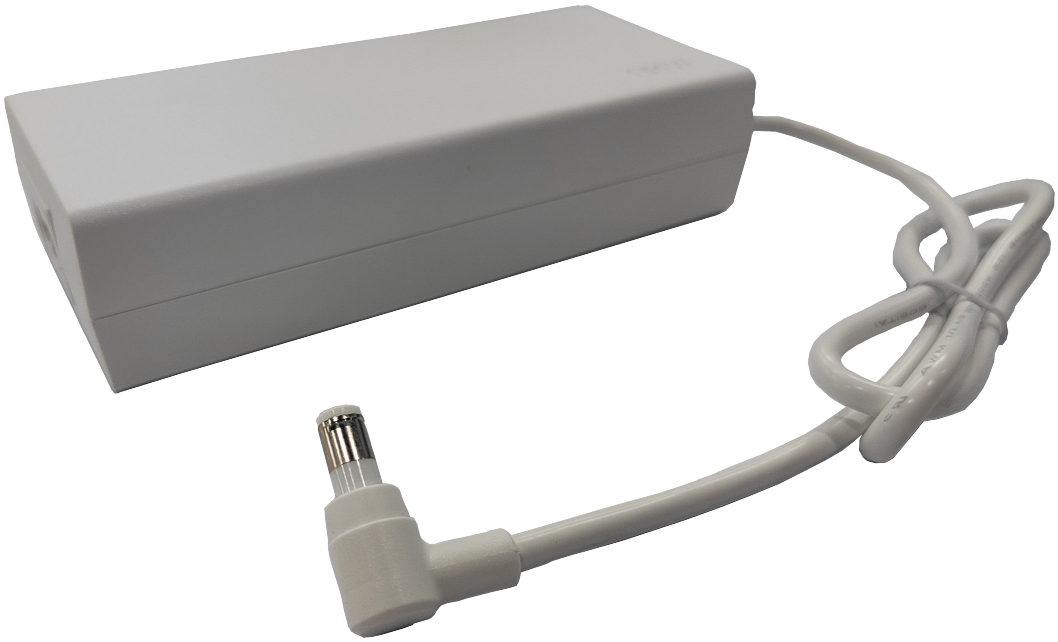

Version Mapping

Table 6-55 Mappings between AD-540278D0D and product models

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L16LP2J-RUA (98012798)	V600R025C00	-
S5751-L-RU	S5751-L16LP2X-RUA (98012796)	V600R025C00	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5751-L-RU	S5751-L16LP4UN2X-RUA (98012800)	V600R025C00	-
S5751-L-RU	S5751-L4LP8UN2X-RUA (98012804)	V600R025C00	-
S5751-L-RU	S5751-L8LP4UN2X-RUA (98012802)	V600R025C00	-
S5751-L-RU	S5751-L8P2HJ-RUA (98012493)	V600R024C00	-
S5751-L-RU	S5751-L8P2HJ-RUA (98012493-001)	V600R024C00	-
S5751-L-RU	S5751-L8P2HX-RUA (98012492)	V600R024C00	-
S5751-L-RU	S5751-L8P2J-RUA (98012487)	V600R024C00	-
S5751-L-RU	S5751-L8P2J-RUA (98012487-001)	V600R024C00	-
S5751-L-RU	S5751-L8P2PN2HX-RUA (98012496)	V600R024C00	-
S5751-L-RU	S5751-L8P2PN2J-RUA (98012494)	V600R024C00	-
S5751-L-RU	S5751-L8P2PN2X-RUA (98012495)	V600R024C00	-
S5751-L-RU	S5751-L8P2PN2X-RUA (98012495-001)	V600R024C00	-
S5751-L-RU	S5751-L8P2X-RUA (98012486)	V600R024C00	-
S5751-L-RU	S5751-L8P2X-RUA (98012486-001)	V600R024C00	-
S5751-L-RU	S5751-L8P4XN-RUA (98013137)	V600R025C10	-
S5751-L-RU	S5751-L8P4XN-RUA (98013137-001)	V600R025C10	-

 Copyright © Huawei Technologies Co., Ltd.

Product	Product Model	First Supported Version	Limitations
S5751R-L	S5751R-L16LP2J-QA (98012799)	V600R025C00	-
S5751R-L	S5751R-L16LP2X-QA (98012797)	V600R025C00	-
S5751R-L	S5751R-L16LP4UN2X-QA (98012801)	V600R025C00	-
S5751R-L	S5751R-L4LP8UN2X-QA (98012805)	V600R025C00	-
S5751R-L	S5751R-L8LP4UN2X-QA (98012803)	V600R025C00	-
S5751R-L	S5751R-L8P2J-QA (98012695)	V600R024C10	-
S5751R-L	S5751R-L8P2PN2X-QA (98012696)	V600R024C10	-
S5751R-L	S5751R-L8P2X-QA (98012694)	V600R024C10	-

Technical Specifications

Table 6-56 Technical specifications of the AD-540278D0D

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	35 mm x 70 mm x 150 mm (1.38 in. x 2.76 in. x 5.91 in.)
Weight without packaging [kg(lb)]	0.4 kg (0.88 lb)
Number of inputs	1
Rated input voltage [V]	170 V AC to 240 V AC; 50/60 Hz
Input voltage range [V]	170 V AC to 264 V AC; 47 Hz to 63 Hz
Maximum input current [A]	2 A
Rated output voltage [V]	54 V
Rated output current [A]	2.78 A
Rated output power [W]	150 W

 Copyright © Huawei Technologies Co., Ltd.

Item	Specification
Power dissipation Mode	Natural heat dissipation without fans

6.17 HW-560268D0D (Adapter-HW-560268D0D-Tabletop-150W-ERP6)

Overview

Table 6-57 Basic information about the HW-560268D0D

Item	Details
Description	Adapter-HW-560268D0D-Tabletop-150W-ERP6
Part Number	02221024
Model	HW-560268D0D

Appearance

Figure 6-20 Appearance of the HW-560268D0D

 Copyright © Huawei Technologies Co., Ltd.

Version Mapping

Table 6-58 Mappings between HW-560268D0D and product models

Product	Product Model	First Supported Version	Limitations
S5731-L-RU	S5731-L4P2HT-RUA (98011776)	V200R021C10SPC500	-
S5731-L-RU	S5731-L4P2S-RUA (98011772)	V200R021C10SPC500	-
S5731-L-RU	S5731-L4P2ST-RUA (98011774)	V200R021C10SPC500	-
S5731-L-RU	S5731-L8P2HT-RUA (98011782)	V200R021C10SPC500	-
S5731-L-RU	S5731-L8P2ST-RUA (98011780)	V200R021C10SPC500	-
S5731S-L-RU	S5731S-L4P2HT-RUA (98011777)	V200R021C10SPC500	-
S5731S-L-RU	S5731S-L4P2S-RUA (98011773)	V200R021C10SPC500	-
S5731S-L-RU	S5731S-L4P2ST-RUA (98011775)	V200R021C10SPC500	-
S5731S-L-RU	S5731S-L8P2HT-RUA (98011783)	V200R021C10SPC500	-
S5731S-L-RU	S5731S-L8P2ST-RUA (98011781)	V200R021C10SPC500	-

Technical Specifications

Table 6-59 Technical specifications of the HW-560268D0D

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	41.5 mm x 80 mm x 180 mm (1.63 in. x 3.15 in. x 7.09 in.)
Weight without packaging [kg(lb)]	0.8 kg (1.76 lb)
Number of inputs	1
Rated input voltage [V]	100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	90 V AC to 290 V AC, 47 Hz to 63 Hz
Maximum input current [A]	2 A

 Copyright © Huawei Technologies Co., Ltd.

Item	Specification
Rated output voltage [V]	56 V
Rated output current [A]	2.68 A
Rated output power [W]	150 W
Power dissipation Mode	Natural heat dissipation without fans
Hot swapping	Supported

 Copyright © Huawei Technologies Co., Ltd.