DIGITUS® 10" socket strip with aluminum profile, 4-way socket outlet with earthing contact

DN-95418

EAN 4016032474777



1U Aluminum PDU, 254 mm (10") rack mount, 4x safety outlet, 16A, 4000W, 250VAC 50/60Hz

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. The power strip can be mounted in the 10" area of the cabinet in a space-saving 1U. Depending on the enclosure type, it is possible to mount the socket strip with the taps facing to the right or left.

Safe and professional power supply in the 10" range

- Horizontal 10" installation in the rack
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: earthing contact plug CEE 7/7, 230 Vac / 16 A
- Rated voltage: 230-250 VAC, 50/60 Hz
- Output: appliance sockets 4 x socket outlet with earthing contact DIN 49440, max. 16 A per output
- Supply cable: cable cross-section: 1.5 mm² , length: 2 m
- Dimensions: 254 mm (10") x 45 (1U) x 45 mm (HxWxD)

Attributes

- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 254 mm (10")

Package contents

- 1 x 10" socket strip, 4-way socket outlet with earthing contact
- 2 x angle profiles for cabinet assembly

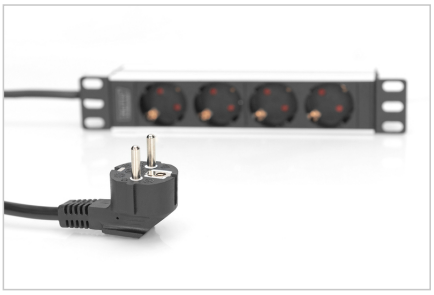
Logistics

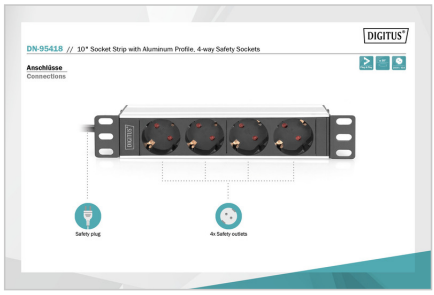
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	7.00	30.00	52.00	48.50	75,660.00
Packaging Unit Inside	1	0.70	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.70	9.70	51.00	5.80	2,869.26
Net single without Packaging	1	0.80	4.50	25.40	4.50	0.00

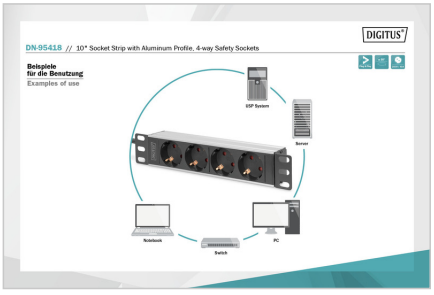
Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:





Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com